

# SHARP

# PNSC701A

# 70 inch All in One

Touchable PNSC701A Series

## Intelligent White Board Education / Meeting



### 01 Highlight



#### Surface Light Wave Touch Technology

Robust usage under situation of 10% discontinuous damage or 80% cover object to reduce repair fee



#### Energy Saving Panel

LED backlight technology lead to high brightness and low power consumption to save energy cost.



#### Intelligent Backlight

Brightness auto-adjust according to environment light for easing eyes loading.



#### High Compatibility and Vision

Enjoy multiple video and audio media playback support by USB drive.



#### High Quality 4K Panel


Use the latest generation 4K Panel to ensure high quality and clear vision with precise technology.




#### 6th Intel Platform Design

Support 4K@60Hz display resolution with lower power consumption and faster computing.

## 02 Front I/O

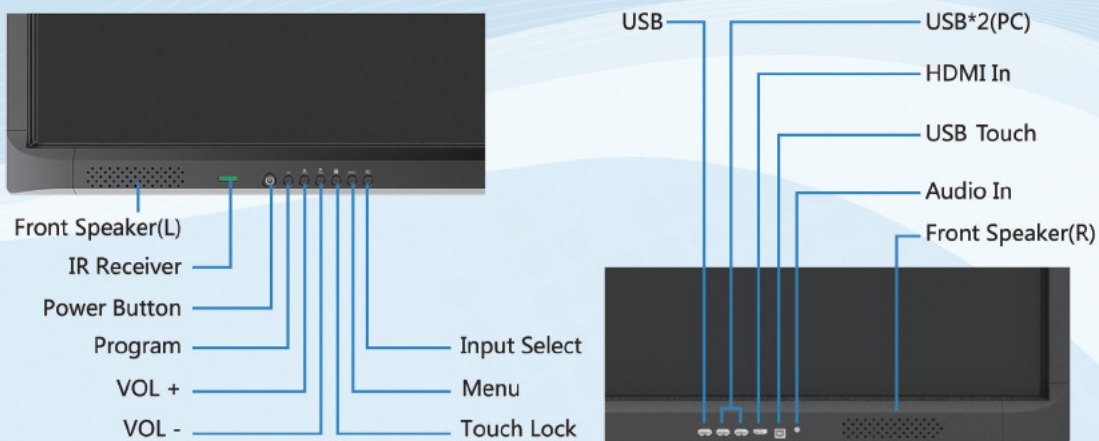

## 03 Rear I/O

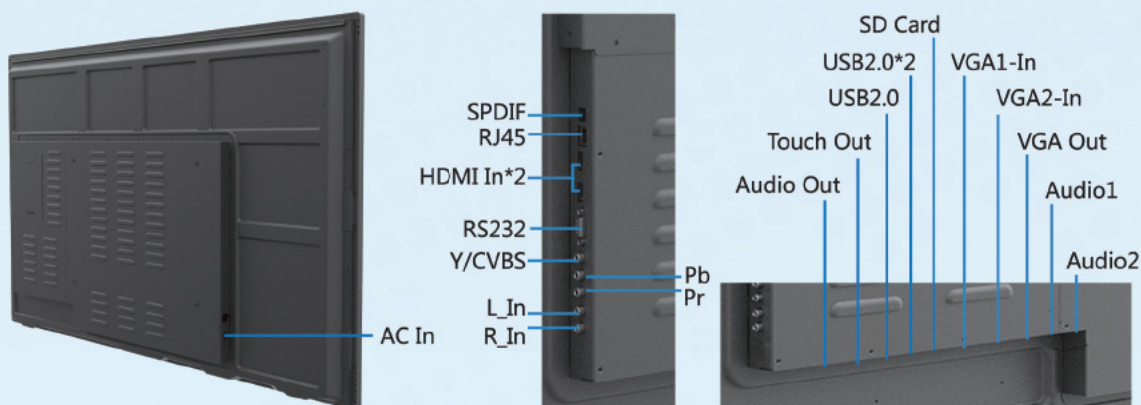

## 04 SPEC

Display	Panel Size	70"
	Resolution	3840 x 2160
	Backlight	D-LED
	Brightness	350cd/m2 (min)
	Contrast Ratio	5000:1
	View Angle	178°/178°
	Lifetime	50,000 hrs
	Response Time(G to G)	6.5ms
	Touch Type	Surface Light Wave (IR)
	Multi-touch	10 point
Touch	Resolution	32768*32768
	Minimum Recognition Point Size	2 mm
	Life Cycle	>100K hours
	Touch Response Time	8ms
	PC Connection Port	USB 2.0
	Input	Finger / Touch Pen
	Ambient Light Resistance	Over 80000(Lux)
Cover Glass	4mm Tempered Glass (AG glass)	
System	I/O	Front Side: HDMI-In *1, USB2.0 *1, USB2.0 *1(Touch out), Audio In *1 Rear Side: SPDIF, RJ45, HDMI*2, RS232, Y/CVBS, Pb, Pr, L_IN, R_IN AUDIO_OUT, Touch_out, USB2.0*3, SD CARD, TV_IN, VGA_1_IN, VGA_2_IN, VGA_OUT, AUDIO_1_IN, AUDIO_2_IN
	Front Button	Power, VOL +/VOL-, Input Select, Menu, Program, Touch Lock
	OPS PC(Optional)	Intel i3/i5/i7, 4G/8G Memory, 500GB/1TB 2.5" SATA HDD, 128G SSD, (Optional PC) I/O : RJ45*1, HDMI(Out)*1, USB3.0*3, USB2.0*3, RS232*1, VGA(Out)*1, Line-out*1, MIC-In*1
	Speaker	10W+10W
	Remote Control	IR Remoter
	Dimension	1628mmx990mmx98mm, 53kg(N.W) 61.5kg (G.W)
	OPS Interface	80 pin
	Mounting Stand(option)	Support 160kg

**SHARP**